

- Heatsinks for SSR,SCR.
- Cooling Fans for SSR

MaxWell Accessories for SSR

SSR and HeatSink Compatible checking list

ITEM NO	SIZE	Compatible SSR	Remark
MW-I	60x50x50	10A/25A	Single Phase SSR
MW-W-A	72x100x50	40A	Single Phase SSR
MW-W-B	100x100x50	60A	Single Phase SSR
MW-T	80x80x70	80A/100A/120A	Single Phase SSR
MW-L	150x88x35	10A/25A	Three Phase SSR
MW-H-A	110x80x80	40A	Three Phase SSR
MW-H-B	150x80x80	60A	Three Phase SSR
MW-Y-A	110x125x135	80A	Three Phase SSR
MW-Y-B	150x125x135	100A/120A	Three Phase SSR
MW-Y-C	170x125x135	150A/200A	Three Phase SSR





Ordering Information(For Single Phase SSR)

MW-I HeatSink

Unit:mm

View from top






Unit Weight: 0.1KG

MW-I:Compatible with Single Phase SSR with load at 10A and 25A(60*50*50)

MW-W-A HeatSink MW-W-B HeatSink

Unit:mm

View from top





MW-W-A: Compatible with Single Phase SSR with load at 40A(72*100*50)

MW-W-B: Compatible with Single Phase SSR with load at 60A(100*100*50)

MW-T HeatSink

Unit:mm

View from top



Unit Weight: 0.4KG



Compatible SSR: Single Phase SSR with load at 80A/100A/120A.(80*70*80)

Ordering Information(For Three Phase SSR)

MW-L HeatSink

Unit:mm

View from the top

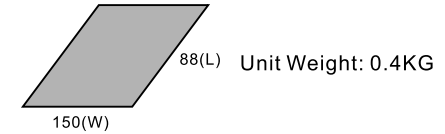




Compatible SSR: Three Phase SSR with load at 10A/25A.(150*88*35)

MW-H-A HeatSink

MW-H-B HeatSink

Unit:mm

View from the top



MW-H-A: Compatible with three phase SSR with load at 40A(110*80*80)

MW-H-B: Compatible with three phase SSR with load at 60A(150*80*80)





MW-Y-A HeatSink

MW-Y-B HeatSink

MW-Y-C HeatSink

Unit:mm

View from the top



MW-Y-A:Compatible with three phase SSR with load at 80A(110*125*135)

MW-Y-B:Compatible with three phase SSR with load at 100A/120A(150*125*135)

MW-Y-C:Compatible with three phase SSR with load at 150A/200A(170*125*135)

MF-1-B-8-110/220



MF-1-B-8-110:Ball bearing Fans(110V)
Size:80mm*80mm, with Metal Protector

MF-1-B-8-220:Ball bearing Fans(220V)
Size:80mm*80mm, with Metal Protector

MF-1-B-12-110/220



MF-1-B-12-110:Ball bearing Fans(110V)
Size:120mm*120mm, with Metal Protector

MF-1-B-12-220:Ball bearing Fans(220V)
Size:120mm*120mm, with Metal Protector

MF-1-S-8-110/220



MF-1-S-8-110:Sleeve bearing Fans(110V)
Size:80mm*80mm, with Metal Protector

MF-1-S-8-220:Sleeve bearing Fans(220V)
Size:80mm*80mm, with Metal Protector

MF-1-S-12-110/220



MF-1-S-12-110:Sleeve bearing Fans(110V)
Size:120mm*120mm, with Metal Protector

MF-1-S-12-220:Sleeve bearing Fans(220V)
Size:120mm*120mm, with Metal Protector

Temperature Controller/Solid State Relay/Rotary Encoder